



FSW

# AIR CONDITIONING & INSTALLATION MATERIALS

---

## PRODUCT GUIDE

Issue 3 | FSW Ireland



VRF heat recovery outdoor unit  
YLM air or water sourced (22-56kW)

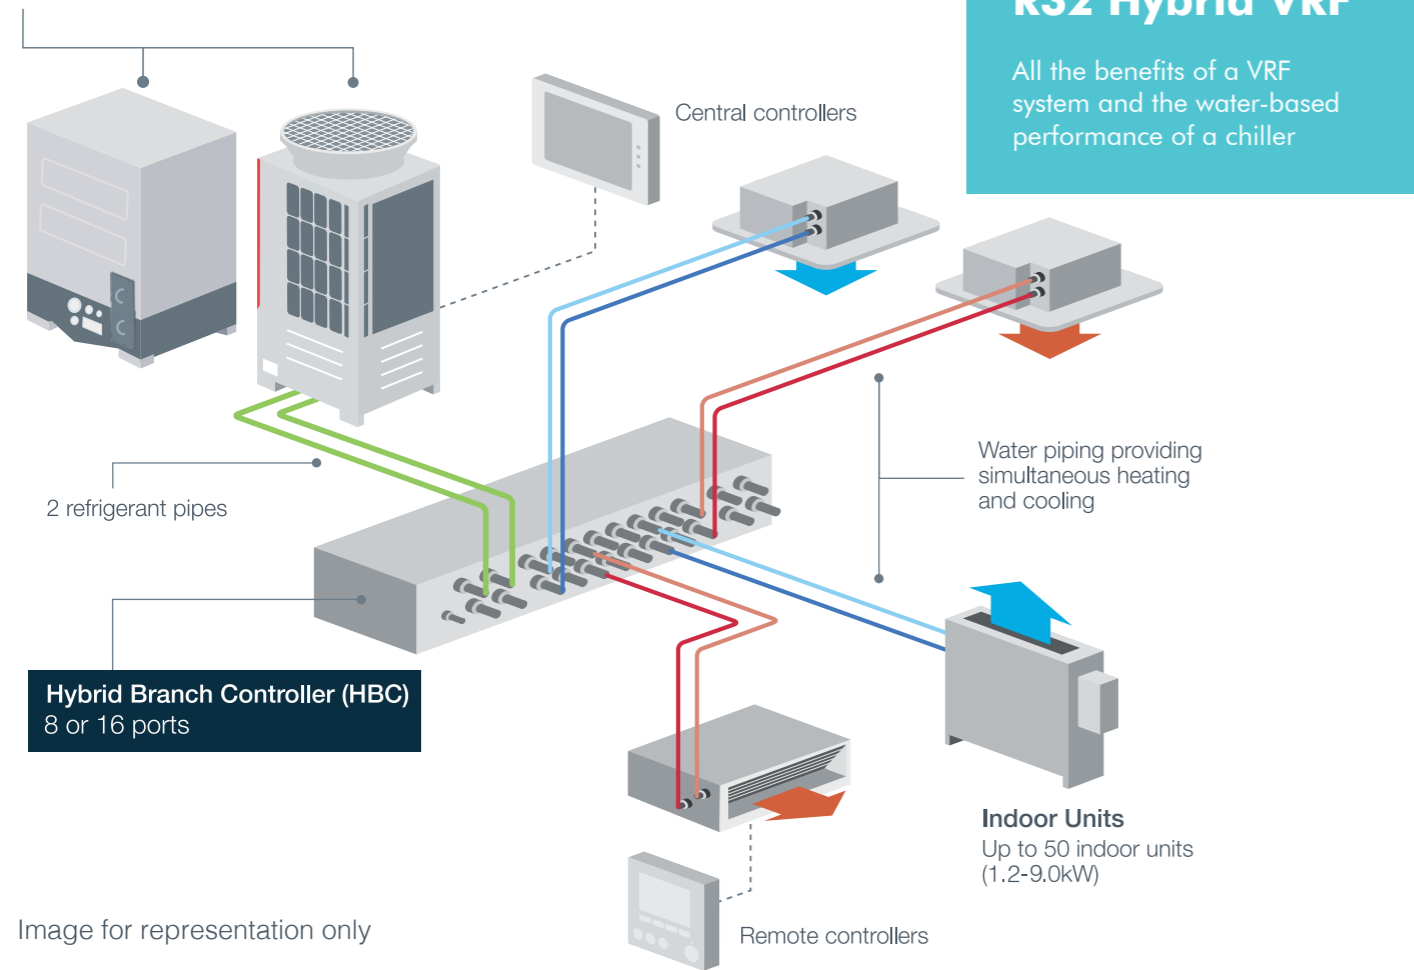


Image for representation only

## R32 Hybrid VRF

All the benefits of a VRF system and the water-based performance of a chiller

## CONTENTS

Wall Mounted	Mitsubishi Electric	4 - 7
Cassette	Mitsubishi Electric	8 - 9
Ceiling	Mitsubishi Electric	10 - 11
Ducted	Mitsubishi Electric	12 - 13
Floor	Mitsubishi Electric	15
Multi Split & Mini VRF	Mitsubishi Electric	16 - 17
Twin / Triple / Quad Splits	Mitsubishi Electric	19 - 20
Ventilation	Mitsubishi Electric	21
Controller & Connection Options		23

Install Materials	Pre-insulated Copper	24
	Copper Tube	26
	Insulation	
	Tube Clamps	27
	Overflow Pipe	
	Overflow Adaptors	28
	Braided Hose	
	Cable Ties	29
	Brackets	
	Cantilever Arms	30
	Mounting Blocks	
	Drip Trays	34
	Slotted Channel	
	Cable Tray	35
	Spring Nuts	
	Nuts/Washer	37
	Threaded Rod	
Refrigerants	40	
OFN		
Trunking	41	
Isolators		
Cable	41	
Condensate Pumps		
Tools	Manifolds	41
	Oxygen, Maxy Gas	
	Tube Cutters	41
	Flare Kits	
	Scales	
	Recovery Units	
Vacuum Pumps		



## R32 Wall Mounted - M Series Standard Inverter - Wi-Fi

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Interconn
MSZ-AP20VGK	2.00 / 2.20	A+++ / A++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	
MSZ-AP25VGK-E1	2.50 / 3.20	A+++ / A++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	
MSZ-AP35VGK-E1	3.50 / 4.00	A+++ / A++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-AP50VGK-E1	5.00 / 5.80	A++ / A+	1/4" 3/8"	7m	20m	12m	20g	16A	Outdoor-1ph	4 core
MSZ-AP60VGK	6.00 / 6.80	A++ / A++	1/4" 1/2"	10m	30m	15m	20g	20A	Outdoor-1ph	4 core
MSZ-AP71VGK	7.10 / 8.10	A++ / A++	1/4" 1/2"	10m	30m	15m	55g	20A	Outdoor-1ph	4 core


For Controller and Connection options, please see page 23 for more details.



## R32 Wall Mounted - M Series Classic Inverter Cost Effective

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Interconn
MSZ-HR25VF	2.50 / 3.15	A++ / A+	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-HR35VF	3.40 / 3.60	A++ / A+	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-HR50VF	5.00 / 5.40	A++ / A+	1/4" 3/8"	7m	20m	12m	20g	16A	Outdoor-1ph	4 core
MSZ-HR60VF	6.10 / 6.80	A++ / A+	1/4" 1/2"	7m	20m	12m	20g	16A	Outdoor-1ph	4 core
MSZ-HR70VF	7.10 / 8.10	A++ / A+	1/4" 1/2"	7m	20m	12m	20g	16A	Outdoor-1ph	4 core

For Controller and Connection options, please see page 23 for more details.



## R32 Wall Mounted - Mr Slim Standard Inverter, High Quality, Cost Effective

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Interconn
PKA-M100KA	9.40 / 11.2	A+ / A+	3/8" 5/8"	30m	55m	30m	40g	32A	Outdoor-1ph	4 core
PKA-M100KA	9.40 / 11.2	A+ / A+	3/8" 5/8"	30m	55m	30m	40g	16A	Outdoor-3ph	4 core

For Controller and Connection options, please see page 23 for more details.



## R32 Wall Mounted - Mr Slim Power Inverter, Top of the range, Energy Efficient



Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Interconn
PKA-M35HA	3.60 / 4.10	A++ / A+	1/4" 1/2"	30m	50m	30m	15g	16A	Outdoor-1ph	4 core
PKA-M50HA	4.60 / 5.00	A++ / A+	1/4" 1/2"	30m	50m	30m	15g	16A	Outdoor-1ph	4 core
PKA-M60KA	6.10 / 7.00	A++ / A+	3/8" 5/8"	30m	55m	30m	40g	25A	Outdoor-1ph	4 core
PKA-M71KA	7.10 / 8.00	A++ / A+	3/8" 5/8"	30m	55m	30m	40g	25A	Outdoor-1ph	4 core
PKA-M100KA	9.50 / 11.2	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	32A	Outdoor-1ph	4 core
PKA-M100KA	9.50 / 11.2	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor-3ph	4 core

For Controller and Connection options, please see page 23 for more details.

## R32 Wall Mounted - Zen Series Inverter, Stylish



Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Interconn
MSZ-EF25VGK- B	2.50 / 3.20	A+++ / A++	1/4" 3/8"	7m	20m	12m	30g	10A	Outdoor-1ph	4 core
MSZ-EF35VGK- B	3.50 / 4.00	A+++ / A++	1/4" 3/8"	7m	20m	12m	30g	10A	Outdoor-1ph	4 core
MSZ-EF50VGK- B	5.00 / 5.80	A++ / A+	1/4" 3/8"	7m	30m	15m	20g	16A	Outdoor-1ph	4 core
MSZ-EF25VGK S	2.50 / 3.20	A+++ / A++	1/4" 3/8"	7m	20m	12m	30g	10A	Outdoor-1ph	4 core
MSZ-EF35VGK- S	3.50 / 4.00	A+++ / A++	1/4" 3/8"	7m	20m	12m	30g	10A	Outdoor-1ph	4 core
MSZ-EF50VGK- S	5.00 / 5.80	A++ / A+	1/4" 3/8"	7m	30m	15m	20g	16A	Outdoor-1ph	4 core
MSZ-EF25VGK- W	2.50 / 3.20	A+++ / A++	1/4" 3/8"	7m	20m	12m	30g	10A	Outdoor-1ph	4 core
MSZ-EF35VGK- W	3.50 / 4.00	A+++ / A++	1/4" 3/8"	7m	20m	12m	30g	10A	Outdoor-1ph	4 core

For Controller and Connection options, please see page 23 for more details.

## R32 Wall Mounted - LN Series Inverter, Stylish units - R32



Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Interconn
MSZ-LN25VG- V NAT	2.50 / 3.20	A+++ / A+++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-LN35VG- V NAT	3.50 / 4.00	A+++ / A+++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-LN50VG- V NAT	5.00 / 6.00	A+++ / A++	1/4" 3/8"	7m	20m	12m	20g	16A	Outdoor-1ph	4 core
MSZ-LN60VG- V NAT	6.10 / 6.80	A++ / A++	1/4" 1/2"	7m	30m	15m	20g	16A	Outdoor-1ph	4 core
MSZ-LN25VG- RUBY	2.50 / 3.20	A+++ / A+++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-LN35VG- RUBY	3.50 / 4.00	A+++ / A+++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-LN50VG- RUBY	5.00 / 6.00	A+++ / A++	1/4" 3/8"	7m	20m	12m	20g	16A	Outdoor-1ph	4 core
MSZ-LN60VG- RUBY	6.10 / 6.80	A++ / A++	1/4" 1/2"	7m	30m	15m	20g	16A	Outdoor-1ph	4 core
MSZ-LN25VG- WHITE	2.50 / 3.20	A+++ / A+++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-LN35VG- WHITE	3.50 / 4.00	A+++ / A+++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-LN50VG- WHITE	5.00 / 6.00	A+++ / A++	1/4" 3/8"	7m	20m	12m	20g	16A	Outdoor-1ph	4 core
MSZ-LN60VG- WHITE	6.10 / 6.80	A++ / A++	1/4" 1/2"	7m	30m	15m	20g	16A	Outdoor-1ph	4 core
MSZ-LN25VG- BLACK	2.50 / 3.20	A+++ / A+++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-LN35VG- BLACK	3.50 / 4.00	A+++ / A+++	1/4" 3/8"	7m	20m	12m	20g	10A	Outdoor-1ph	4 core
MSZ-LN50VG- BLACK	5.00 / 6.00	A+++ / A++	1/4" 3/8"	7m	20m	12m	20g	16A	Outdoor-1ph	4 core
MSZ-LN60VG- BLACK	6.10 / 6.80	A++ / A++	1/4" 1/2"	7m	30m	15m	20g	16A	Outdoor-1ph	4 core

For Controller and Connection options, please see page 23 for more details.





## R32 Compact Cassette - Mr Slim 600mm x 600mm

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
SLZ-M25FA	2.50 / 3.20	A++ / A+	1/4" 3/8"	7m	20m	12m	15g	10A	Outdoor-1ph	4 core
SLZ-M35FA	3.50 / 4.00	A++ / A+	1/4" 3/8"	7m	20m	12m	15g	10A	Outdoor-1ph	4 core
SLZ-M50FA	4.60 / 5.00	A++ / A+	1/4" 1/2"	7m	30m	30m	15g	20A	Outdoor-1ph	4 core
SLZ-M60FA	5.70 / 6.40	A++ / A+	1/4" 5/8"	7m	30m	30m	40g	20A	Outdoor-1ph	4 core

For Controller and Connection options, please see page 23 for more details.



## R32 Cassette - Mr Slim Standard Inverter, High Quality, Cost Effective - 900mm x 900mm

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
<b>1PH Systems</b>										
PLA-M35EA	3.60 / 4.10	A++ / A++	1/4" 3/8"	7m	20m	12m	15g	10A	Outdoor -1ph	4 core
PLA-M50EA	5.50 / 5.80	A+ / A++	1/4" 1/2"	7m	30m	30m	15g	20A	Outdoor -1ph	4 core
PLA-M60EA	5.70 / 6.90	A+ / A++	1/4" 5/8"	7m	30m	30m	40g	20A	Outdoor -1ph	4 core
PLA-M71EA	7.10 / 8.00	A+ / A++	3/8" 5/8"	7m	30m	30m	40g	20A	Outdoor -1ph	4 core
PLA-M100EA	9.40 / 11.20	A++ / A++	3/8" 5/8"	20m	55m	30m	40g	32A	Outdoor -1ph	4 core
PLA-M125EA	12.30 / 14.00	A+ / A+	3/8" 5/8"	30m	65m	30m	40g	32A	Outdoor -1ph	4 core
PLA-M140EA	13.60 / 16.00	A+ / A+	3/8" 5/8"	30m	65m	30m	40g	40A	Outdoor -1ph	4 core
<b>3PH Systems</b>										
PLA-M100EA	9.40 / 11.20	A++ / A++	3/8" 5/8"	20m	55m	30m	40g	16A	Outdoor -3ph	4 core
PLA-M125EA	12.30 / 14.00	-	3/8" 5/8"	30m	65m	30m	40g	16A	Outdoor -3ph	4 core
PLA-M140EA	13.60 / 16.00	-	3/8" 5/8"	30m	65m	30m	40g	16A	Outdoor -3ph	4 core

For Controller and Connection options, please see page 23 for more details.



## R32 Cassette - Mr Slim Inverter, Cost Effective - 900mm x 900mm

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
<b>1PH Systems</b>										
PLA-SM71EA	7.10 / 8.00	A+ / A	3/8" 5/8"	7m	30m	30m	40g	20A	Outdoor -1ph	4 core
PLA-SM100EA	9.50 / 11.20	A+ / A+	3/8" 5/8"	30m	30m	30m	40g	32A	Outdoor -1ph	4 core
PLA-SM125EA	12.10 / 13.50	A / A	3/8" 5/8"	30m	40m	30m	40g	32A	Outdoor -1ph	4 core
PLA-SM140EA	13.40 / 15.00	A / A	3/8" 5/8"	30m	40m	30m	40g	40A	Outdoor -1ph	4 core

### 3PH Systems

PLA-SM100EA	9.50 / 11.20	A+ / A+	3/8" 5/8"	30m	30m	30m	40g	16A	Outdoor -3ph	4 core
PLA-SM125EA	12.10 / 13.50	A / A	3/8" 5/8"	30m	40m	30m	40g	16A	Outdoor -3ph	4 core
PLA-SM140EA	13.40 / 15.00	A / A	3/8" 5/8"	30m	40m	30m	40g	16A	Outdoor -3ph	4 core

## R32 Cassette - Mr Slim Power Inverter - Top of the range, Energy Efficient - 900mm x 900mm

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
<b>1PH Systems</b>										
PLA-ZM35EA	3.60 / 4.10	A++ / A++	1/4" 1/2"	30m	50m	30m	15g	16A	Outdoor -1ph	4 core
PLA-ZM50EA	5.00 / 6.00	A++ / A++	1/4" 1/2"	30m	50m	30m	15g	16A	Outdoor -1ph	4 core
PLA-ZM60EA	6.10 / 7.00	A++ / A++	3/8" 5/8"	30m	55m	30m	40g	25A	Outdoor -1ph	4 core
PLA-ZM71EA	7.10 / 8.00	A++ / A++	3/8" 5/8"	30m	55m	30m	40g	25A	Outdoor -1ph	4 core
PLA-ZM100EA	9.50 / 11.20	A++ / A++	3/8" 5/8"	30m	100m	30m	40g	32A	Outdoor -1ph	4 core
PLA-ZM125EA	12.50 / 14.00	-	3/8" 5/8"	30m	100m	30m	40g	32A	Outdoor -1ph	4 core
PLA-ZM140EA	13.40 / 16.00	-	3/8" 5/8"	30m	100m	30m	40g	40A	Outdoor -1ph	4 core

### 3PH Systems

PLA-ZM100EA	9.40 / 11.20	A++ / A++	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core
PLA-ZM125EA	12.50 / 14.00	-	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core
PLA-ZM140EA	13.40 / 16.00	-	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core

For Controller and Connection options, please see page 23 for more details.



## R32 Ceiling - Mr Slim Standard Inverter, High Quality, Cost Effective

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
PCA-M50KA	5.00 / 5.50	A+ / A+	1/4" 1/2"	30m	30m	30m	15g	16A	Outdoor -1ph	4 core
PCA-M60KA	6.00 / 7.00	A+ / A+	1/4" 5/8"	30m	30m	30m	40g	25A	Outdoor -1ph	4 core
PCA-M71KA	7.10 / 8.00	A+ / A+	3/8" 5/8"	30m	30m	30m	40g	25A	Outdoor -1ph	4 core
PCA-M100KA	9.50 / 11.20	A+ / A+	3/8" 5/8"	30m	55m	30m	40g	32A	Outdoor -1ph	4 core
PCA-M125KA	12.50 / 14.00	A+ / A	3/8" 5/8"	30m	65m	30m	40g	32A	Outdoor -1ph	4 core
PCA-M140KA	13.40 / 16.00	A+ / A	3/8" 5/8"	30m	65m	30m	40g	40A	Outdoor -1ph	4 core
PCA-M100KA	9.50 / 11.20	A+ / A+	3/8" 5/8"	30m	55m	30m	40g	16A	Outdoor -3ph	4 core
PCA-M125KA	12.50 / 14.00	A+ / A	3/8" 5/8"	30m	65m	30m	40g	16A	Outdoor -3ph	4 core
PCA-M140KA	13.40 / 16.00	A+ / A	3/8" 5/8"	30m	65m	30m	40g	16A	Outdoor -3ph	4 core

For Controller and Connection options, please see page 23 for more details.

## R32 Ceiling - Mr Slim Power Inverter, Top of the range, Energy Efficient

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
PCA-M50KA	5.00 / 5.50	A++ / A+	1/4" 1/2"	30m	50m	30m	15g	16A	Outdoor -1ph	4 core
PCA-M60KA	6.00 / 7.00	A++ / A+	3/8" 5/8"	30m	55m	30m	40g	25A	Outdoor -1ph	4 core
PCA-M71KA	7.10 / 8.00	A++ / A+	3/8" 5/8"	30m	55m	30m	40g	25A	Outdoor -1ph	4 core
PCA-M100KA	9.50 / 11.20	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	32A	Outdoor -1ph	4 core
PCA-M125KA	12.50 / 14.00	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	32A	Outdoor -1ph	4 core
PCA-M140KA	13.40 / 16.00	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	40A	Outdoor -1ph	4 core
PCA-M100KA	9.50 / 11.20	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core
PCA-M125KA	12.50 / 14.00	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core
PCA-M140KA	13.40 / 16.00	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core

For Controller and Connection options, please see page 23 for more details.



## R32 Stainless Steel Kitchen Unit


Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
PCA-M71HA	7.10 / 8.00	A+ / A	3/8" 5/8"	30m	55m	30m	32g	25A	Outdoor -1ph	4 core



## R32 Duct - Mr Slim Standard Inverter, High Quality, Cost Effective

Model	Cool / Heat kW	SEER / SCOP	Pipe Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
<b>1PH Systems</b>										
PEAD-M35JA	3.60 / 3.60	A+ / A	1/4" 3/8"	7m	20m	12m	15g	16A	Outdoor -1ph	4 core
PEAD-M50JA	5.00 / 6.00	A++ / A+	1/4" 1/2"	7m	30m	30m	15g	20A	Outdoor -1ph	4 core
PEAD-M60JA	6.10 / 7.00	A+ / A+	1/4" 5/8"	7m	30m	30m	40g	20A	Outdoor -1ph	4 core
PEAD-M71JA	7.10 / 8.00	A++ / A	3/8" 5/8"	7m	30m	30m	40g	20A	Outdoor -1ph	4 core
PEAD-M100JA01	9.50 / 11.20	A+ / A	3/8" 5/8"	20m	55m	30m	40g	32A	Outdoor -1ph	4 core
PEAD-M125JA	12.10 / 13.50	A / B	3/8" 5/8"	30m	65m	30m	40g	32A	Outdoor -1ph	4 core
PEAD-M140JA	13.60 / 16.00	A / B	3/8" 5/8"	30m	65m	30m	40g	40A	Outdoor -1ph	4 core
<b>3PH Systems</b>										
PEAD-M100JA	9.50 / 11.20	A+ / A+	3/8" 5/8"	20m	55m	30m	40g	16A	Outdoor -3ph	4 core
PEAD-M125JA	12.10 / 13.50	A+ / A	3/8" 5/8"	30m	65m	30m	40g	16A	Outdoor -3ph	4 core
PEAD-M140JA	13.40 / 15.00	A+ / A	3/8" 5/8"	30m	65m	30m	40g	16A	Outdoor -3ph	4 core

For Controller and Connection options, please see page 23 for more details.



## R32 Duct - Mr Slim Inverter

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
SEZ-M25DA	2.50 / 2.90	A / A	1/4" 3/8"	7m	20m	12m	15g	10A	Outdoor -1ph	4 core
SEZ-M35DA	3.50 / 4.20	A+ / A+	1/4" 3/8"	7m	20m	12m	15g	10A	Outdoor -1ph	4 core
SEZ-M50DA	5.10 / 6.00	A+ / A+	1/4" 1/2"	7m	30m	30m	40g	20A	Outdoor -1ph	4 core
SEZ-M60DA	6.10 / 7.40	A / A+	1/4" 5/8"	7m	30m	30m	40g	20A	Outdoor -1ph	4 core
SEZ-M71DA	7.10 / 8.10	A / A	3/8" 5/8"	7m	30m	30m	40g	20A	Outdoor -1ph	4 core

All unit dimensions Height 200mm, Depth 700mm. PAC-SA89TA (3 Wire Adaptor) for Remote On/Off Volt Free Contact. PAC-SA8HA (5 Wire Adaptor) for Fault and Run output 12VDC For Controller and Connection options, please see page 23 for more details.

## R32 Duct - Mr Slim Power Inverter, Top of the range, Energy Efficient

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Inter-conn
<b>1PH Systems</b>										
PEAD-M35JA	3.60 / 4.10	A+ / A	1/4" 1/2"	30m	50m	30m	15g	16A	Outdoor -1ph	4 core
PEAD-M50JA	5.00 / 6.00	A++ / A+	1/4" 1/2"	30m	50m	30m	15g	16A	Outdoor -1ph	4 core
PEAD-M60JA	6.10 / 7.00	A++ / A+	3/8" 5/8"	30m	55m	30m	40g	25A	Outdoor -1ph	4 core
PEAD-M71JA	7.10 / 8.00	A+ / A	3/8" 5/8"	30m	55m	30m	40g	25A	Outdoor -1ph	4 core
PEAD-M100JA	9.50 / 11.20	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	32A	Outdoor -1ph	4 core
PEAD-M125JA	12.50 / 14.00	A+ / A	3/8" 5/8"	30m	100m	30m	40g	32A	Outdoor -1ph	4 core
PEAD-M140JA	13.40 / 16.00	A+ / A+	3/8" 5/8"	30m	100m	30m	40g	40A	Outdoor -1ph	4 core
<b>3PH Systems</b>										
PEAD-M100JA	10.00 / 11.20	A++ / A+	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core
PEAD-M125JA	12.50 / 14.00	A+ / A	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core
PEAD-M140JA	13.40 / 16.00	A+ / A+	3/8" 5/8"	30m	100m	30m	40g	16A	Outdoor -3ph	4 core

All unit dimensions Height 250mm, Depth 732mm. PAC-SA89TA (3 Wire Adaptor) for Remote On/Off Volt Free Contact. PAC-SA8HA (5 Wire Adaptor) for Fault and Run output 12VDC For Controller and Connection options, please see page 23 for more details.



## about Ireland's first R32 VRF system

Available in both heat recovery and heat pump variants, the new R32 YNW system offers the complete design flexibility, high-efficiency and low noise that is only available from the City Multi range.

The ongoing implications of the F-Gas phase down means that businesses are under pressure to reduce their global warming impact as never before. The addition of this R32 VRF solution delivers Ireland's only complete range of R32 air conditioning so that one single refrigerant can now be used across a complete building or an entire estate.



R32 has a global warming potential (GWP) of 675, compared with R410A, which has a GWP of 2,088.

COOLING | HEATING | VENTILATION | CONTROLS



### Floor - Mr Slim Power Inverter

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Interconn
<b>1PH Systems</b>										
PSA-RP71KA	7.10 / 7.60	A++ / A+	3/8" 5/8"	30m	50m	30m	60g	25A	Outdoor -1ph	4 core
PSA-RP100KA	9.50 / 11.20	A+ / A+	3/8" 5/8"	30m	75m	30m	60g	32A	Outdoor -1ph	4 core
PSA-RP125KA	12.50 / 14.00	N/A	3/8" 5/8"	30m	75m	30m	60g	32A	Outdoor -1ph	4 core
PSA-RP140KA	13.40 / 16.00	N/A	3/8" 5/8"	30m	75m	30m	60g	32A	Outdoor -1ph	4 core
<b>3PH Systems</b>										
PSA-RP100KA	9.50 / 11.20	A / A+	3/8" 5/8"	30m	75m	30m	60g	16A	Outdoor -3ph	4 core
PSA-RP125KA	12.50 / 14.00	N/A	3/8" 5/8"	30m	75m	30m	60g	16A	Outdoor -3ph	4 core
PSA-RP140KA	13.40 / 16.00	N/A	3/8" 5/8"	30m	75m	30m	60g	32A	Outdoor -3ph	4 core

For Controller and Connection options, please see page 23 for more details.

### R32 Floor Mounted - M Series Inverter

Model	Cool / Heat kW	SEER / SCOP	Pipes Liq / Suc	Pre-Charged	Max Run	Max Height	Extra Ref g/m	Fuse	Power To	Interconn
MFZ-KT25VG	2.50 / 3.40	A++ / A+	1/4" 3/8"	7m	20m	12m	p20-21	10A	Outdoor-1ph	4 core
MFZ-KT35VG	3.50 / 4.30	A++ / A+	1/4" 3/8"	7m	20m	12m	p20-21	10A	Outdoor-1ph	4 core
MFZ-KT50VG	5.00 / 6.00	A++ / A+	1/4" 1/2"	7m	30m	30m	p20-21	20A	Outdoor-1ph	4 core

Wired Controller Option

Wired Controller PAR-41MAA and Contact Terminal MAC-497IF

For Controller and Connection options, please see page 23 for more details.





## Multi Splits R32

Outdoor	Duty kW
<b>R32</b>	
MXZ-2F42VF	4.20 / 4.50
MXZ-3F54VF	5.40 / 7.00
MXZ-3F68VF	6.80 / 8.60
MXZ-4F72VF	7.20 / 8.60
MXZ-4F83VF	8.30 / 9.30
MXZ-5F102VF	10.2 / 10.5
MXZ-5F122VF	12.2 / 14.00
<b>R410A</b>	
MXZ-2D53VA	5.30 / 6.40
MXZ-3D54VA	5.40 / 7.00
MXZ-4D72VA	7.10 / 8.60
MXZ-4E83VA	8.30 / 9.40
MXZ-5E102VA	10.20 / 10.50
MXZ-6D122VA	12.20 / 14.00
PUMY-SP112VKM- 1PH	12.50 / 14.00
PUMY-SP125VKM- 1PH	14.00 / 16.00
PUMY-SP140VKM- 1PH	15.50 / 16.50
PUMY-P112VKM- 1PH	12.50 / 14.00
PUMY-P125VKM- 1PH	14.00 / 16.00
PUMY-P140VKM- 1PH	15.50 / 16.50
PUMY-P200VKM- 3PH	22.40 / 25.00



Indoor	Duty kW	Type
MSZ-AP15VF	1.50	Wall - NON WiFi
MSZ-AP25VGK	2.50	Wall - WiFi
MSZ-AP35VGK	3.50	Wall - WiFi
MSZ-AP50VGK	5.00	Wall - WiFi
MSZ-AP60VGK	6.00	Wall - WiFi
MSZ-AP71VGK	7.10	Wall - WiFi
MSZ-LN18VG Black	1.80	LN Black
MSZ-LN18VGR-	1.80	LN Red
MSZ-LN18VGV-	1.80	LN Pearl White
MSZ-LN25VGW-	2.50	LN White
MSZ-LN35VGW-	3.50	LN White
MSZ-LN50VGW-	5.00	LN White
MSZ-LN60VGW-	6.10	LN White
MSZ-LN25VG BLACK	2.50	LN Black
MSZ-LN35VG BLACK	3.50	LN Black
MSZ-LN50VG BLACK	5.00	LN Black
MSZ-LN60VG BLACK	6.10	LN Black

For compatibility please see the compatibility table

[www.fridgespareswholesale.ie](http://www.fridgespareswholesale.ie)

## Multi Splits

Indoor	Duty kW	Type
MSZ-EF25VGK-B	2.50	Zen Black inc. Wi-Fi
MSZ-EF35VGKB	3.50	Zen Black inc. Wi-Fi
MSZ-EF50VGK-B	5.00	Zen Black inc. Wi-Fi
MSZ-EF25VGK-W	2.50	Zen White inc. Wi-Fi
MSZ-EF35VGK-W	3.50	Zen White inc. Wi-Fi
MSZ-EF50VGK W	5.00	Zen White inc. Wi-Fi
MSZ-EF25VGK-S	2.50	Zen Silver inc. Wi-Fi
MSZ-EF35VGK-S	3.50	Zen Silver inc. Wi-Fi
MSZ-EF50VGK S	5.00	Zen Silver inc. Wi-Fi
MFZ-KT25VE	2.50	Floor
MFZ-KT35VE	3.50	Floor
MFZ-KT50VE	5.00	Floor
SEZ-M25DA	2.50	Compact Duct
SEZ-M35DA	3.50	Compact Duct
SEZ-M50DA	5.00	Compact Duct
SEZ-M60DA	6.10	Compact Duct
SEZ-M71DA	7.10	Compact Duct

For compatibility please see the compatibility table

[www.fridgespareswholesale.ie](http://www.fridgespareswholesale.ie)



Indoor	Type	Duty kW
PEAD-M50JA	Duct	5.00
PEAD-M60JA	Duct	6.00
PEAD-M71JA	Duct	7.10
SLZ-M25FA.TH	Cassette 600 x 600	2.50
SLZ-M35FA.TH	Cassette 600 x 600	3.50
SLZ-M50FA.TH	Cassette 600 x 600	5.00
SLP-2FA	Grille 600 x 600	
PLA-M35EA	Cassette 900 x 900	5.00
PLA-M50EA	Cassette 900 x 900	6.00
PLA-M60EA	Cassette 900 x 900	7.10
PLA-M71EA	Cassette 900 x 900	7.10
PLA-M100EA	Cassette 900 x 900	7.10
PLP-6EA GRILLE	Grille 900 x 900	
PCA-M50KA	Ceiling	5.00
PCA-M60KA	Ceiling	6.00
PCA-M71KA	Ceiling	7.10
PAR-41MAA	Wired Controller	
PAC-LV11M	LEV Kit for M-series to PUMY	

## Multi Split Combination Table

Model	MXZ-3F33VF2	MXZ-3F42VF2	MXZ-3F54VF2	MXZ-3F66VF2	MXZ-4F72VF2	MXZ-4F80VF2	MXZ-4E83VA	MXZ-5E100VA	MXZ-6D120VA	PUMY-SP112/125/140	PUMY-SP112/125/140/200	PUMY-SP112/125/140/200
	Branch Box	LEV Kit	Branch Box	LEV Kit	Branch Box	LEV Kit	Branch Box	LEV Kit	Branch Box	LEV Kit	Branch Box	LEV Kit
<b>Wall Mounted</b>												
MSZ-LN18VG	•	•	•	•	•	•	•	•	•	•	•	•
MSZ-LN25VG	•	•	•	•	•	•	•	•	•	•	•	•
MSZ-LN35VG	•	•	•	•	•	•	•	•	•	•	•	•
MSZ-LN50VG	•	•	•	•	•	•	•	•	•	•	•	•
MSZ-EF25VG	•	•	•	•	•	•	•	•	•	•	•	•
MSZ-EF35VG	•	•	•	•	•	•	•	•	•	•	•	•
MSZ-EF50VG	•	•	•	•	•	•	•	•	•	•	•	•
MSZ-AP50VG(K)	•	•	•	•	•	•	•	•	•	•	•	•
PKFY-P10/15/20/25/32/40/50VLM-E												•
PKFY-P63VKM-E												•
<b>Floor Mounted</b>												
MFZ-KJ25VE2							•	•	•		•	•
MFZ-KJ35VE2							•	•	•		•	•
MFZ-KJ50VE2							•	•	•		•	•
PFY-P20/25/32/40/50/63VCM-E												•
PFY-P20/25/32/40/50/63VLEM-E												•
PFY-P20/25/32/40VKM-E												•
<b>Ceiling Cassette</b>												
SLZ-M15FA	•	•	•	•	•	•	•	•	•	•	•	•
SLZ-M25FA	•	•	•	•	•	•	•	•	•	•	•	•
SLZ-M35FA	•	•	•	•	•	•	•	•	•	•	•	•
SLZ-M50FA	•	•	•	•	•	•	•	•	•	•	•	•
PLA-M35EA												•
PLA-M50EA							•	•	•			•
PLA-M60EA							•	•	•			•
PLA-M71EA							•	•	•			•
PLA-M100EA							•	•	•			•
PLFY-P32/40/50/63/80/100/125VEM-E												•
PLFY-P15/20/25/32/40/50VFM-E												•
<b>Ceiling Concealed Ducted</b>												
SEZ-M25DA	•	•	•	•	•	•	•	•	•	•	•	•
SEZ-M35DA	•	•	•	•	•	•	•	•	•	•	•	•
SEZ-M50DA	•	•	•	•	•	•	•	•	•	•	•	•
SEZ-M60DA	•	•	•	•	•	•	•	•	•	•	•	•
SEZ-M71DA	•	•	•	•	•	•	•	•	•	•	•	•
PEAD-M50JA			•	•	•	•	•	•	•	•	•	•
PEAD-M60JA			•	•	•	•	•	•	•	•	•	•
PEAD-M71JA			•	•	•	•	•	•	•	•	•	•
PEAD-M100JA			•	•	•	•	•	•	•	•	•	•
PEFY-P15/20/25/32/40/50/63VMS1-E												•
PEFY-P20/25/32/40/50/63/80/100/125VMA-E3												•
PEFY-P80/100/125/140VMH-E(2)												•
<b>Ceiling Suspended</b>												
PCA-M50KA			•	•	•	•	•	•	•	•	•	•
PCA-M60KA			•	•	•	•	•	•	•	•	•	•
PCA-M71KA			•	•	•	•	•	•	•	•	•	•
PCA-M100KA			•	•	•	•	•	•	•	•	•	•
PCFY-P40/63/100/125VKM-E												•
<b>Lossnay Outdoor Air Processing</b>												
GUF-50/100RD4												•

Note: For MXZ Multi-Split capacity combination tables please refer to databook. \*1 PUMY-P200YKM2 not connectable.

## Twin / Triple / Quad Systems

# R32

Outdoor	Duty kW	Type
<b>R32</b>		
PUZ-ZM71VHA	7.10	Power Inverter 1PH
PUZ-ZM100VKA	10.00	Power Inverter 1PH
PUZ-ZM125VKA	12.50	Power Inverter 1PH
PUZ-ZM140VKA	14.00	Power Inverter 1PH
PUZ-ZM100YKA	10.00	Power Inverter 3PH
PUZ-ZM125YKA	12.50	Power Inverter 3PH
PUZ-ZM140YKA	14.00	Power Inverter 3PH
PUZ-ZM200YKA	22.40	Power Inverter 3PH
PUZ-ZM250YKA	27.00	Power Inverter 3PH

# R32

Indoor	Duty kW	Type
<b>R32</b>		
PUZ-M100VKA	10.00	Standard Inverter 1PH
PUZ-M125VKA	12.50	Standard Inverter 1PH
PUZ-M140VKA	14.00	Standard Inverter 1PH
PUZ-M100YKA	10.00	Standard Inverter 3PH
PUZ-M125YKA	12.50	Standard Inverter 3PH
PUZ-M140YKA	14.00	Standard Inverter 3PH
PUZ-M200YKA	22.40	Standard Inverter 3PH
PUZ-M250YKA	27.00	Standard Inverter 3PH

## Portables - Heating and Cooling

Model	Cool kW	EER	Air Flow	dB(A)	Hose Length	Weight	Height	Width	Refrigerant	Suitable for Areas	Code
PORTABLE A/C HC	3.50	2.60	370 m3/h	65	1.5m	34kg	765mm	467mm	R290	upto 26m2	PORTABLE A/C HC



## Twin / Triple / Quad Systems



Indoor	Duty kW	Type
PLA-ZM35EA	3.50	Cassette for Power Inv
PLA-ZM50EA	5.00	Cassette for Power Inv
PLA-ZM60EA	6.00	Cassette for Power Inv
PLA-ZM71EA	7.10	Cassette for Power Inv
PLA-ZM100EA	10.00	Cassette for Power Inv
PLA-ZM125EA	12.50	Cassette for Power Inv
PLA-ZM140EA	14.00	Cassette for Power Inv
PLP-6EA		Grille 900x900
PLA-M35EA	3.50	Cassette for Std Inv
PLA-M50EA	5.00	Cassette for Std Inv
PLA-M60EA	6.00	Cassette for Std Inv
PLA-M71EA	7.10	Cassette for Std Inv
PLA-M100EA	10.00	Cassette for Std Inv
PLA-M125EA	12.50	Cassette for Std Inv
PLA-M140EA	14.00	Cassette for Std Inv
PLP-6EA GRILLE		Grille 900x900
MSDD-50TR-E-R410A		Refnet for Twin Split - C/U 71/100/125/140
MSDD-50WR-E-R410A		Refnet for Twin Split - C/U sizes 200/250
MSDT-111R-E-R410A		Refnet for Triple Split - C/U 140/200/250
MSDF-111R-E-R410A		Refnet for Quad Split - C/U - sizes 200/250
MSDD-50TR2-E-R32		Refnet for Twin Split - 71/100/125/140
MSDT-111R2-E-R32		Refnet for Triple Split - 140
PAR-41MAA		Wired Remote Controller

Indoor	Duty kW	Type
PKA-M35HA	3.50	Wall
PKA-M50HA	5.00	Wall
PKA-M60KA	6.00	Wall
PKA-M71KA	7.10	Wall
PKA-M100KA	10.00	Wall
PEAD-M35JA	3.50	Duct
PEAD-M50JA	5.00	Duct
PEAD-M60JA	6.00	Duct
PEAD-M71JA	7.10	Duct
PEAD-M100JA	10.00	Duct
PEAD-M125JA	12.50	Duct
PEAD-M140JA	14.00	Duct
PCA-M50KA	5.00	Ceiling
PCA-M60KA	6.00	Ceiling
PCA-M71KA	7.10	Ceiling
PCA-M100KA	10.00	Ceiling
PCA-M125KA	12.50	Ceiling
PCA-M140KA	14.00	Ceiling
SLZ-M35FA.TH	3.50	Compact Cassette
SLZ-M50FA.TH	5.00	Compact Cassette
SLZ-M60FA.TH	6.00	Compact Cassette
SLP-2FA		Grille



## Lossnay Commercial Series

Model	Air Flow m3/h			Duct Size	Fuse
	Extra low	Low	High / Extra High		
LGH-15RVX-E	38	113	150	100	6 amps
LGH-25RVX-E	63	188	250	150	6 amps
LGH-35RVX-E	88	263	350	150	6 amps
LGH-50RVX-E	125	375	500	200	6 amps
LGH-65RVX-E	163	488	650	200	6 amps
LGH-80RVX-E	200	600	800	250	6 amps
LGH-100RVX-E	250	750	1000	250	6 amps
LGH-150RVX-E	375	1125	1500	(SA,RA)250 (OA,EA)270x700	10 amps
LGH-200RVX-E	500	1500	2000	(SA,RA)250 (OA,EA)270x700	16 amps



Lossnay High Efficiency Filter	PZ-15RFM	Air Filter For LGH15	
Lossnay High Efficiency Filter	PZ-25RFM	Air Filter For LGH25	
Lossnay High Efficiency Filter	PZ-35RFM	Air Filter For LGH35	
Lossnay High Efficiency Filter	PZ-50RFM-E	Air Filter For LGH50	
Lossnay High Efficiency Filter	PZ-65RFM	Air Filter For LGH65	
Lossnay High Efficiency Filter	PZ-80RFM	Air Filter For LGH80-150	
Lossnay High Efficiency Filter	PZ-100RFM-E	Air Filter For LGH100-200	
Lossnay Remote Controller	PZ-62DR-E		

# Ventilation

## Product Information

**LGH-RVXT-E**  
Commercial Lossnay

Making a  
World of  
Difference

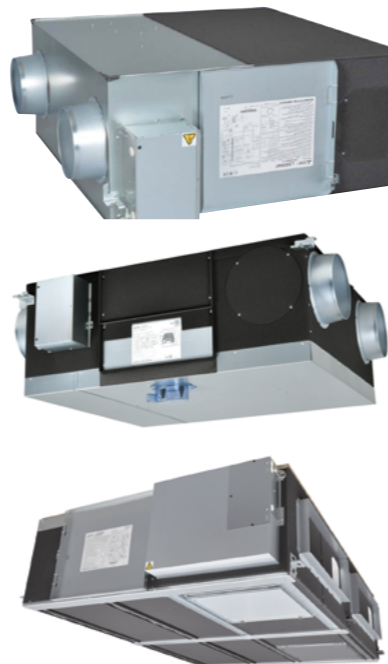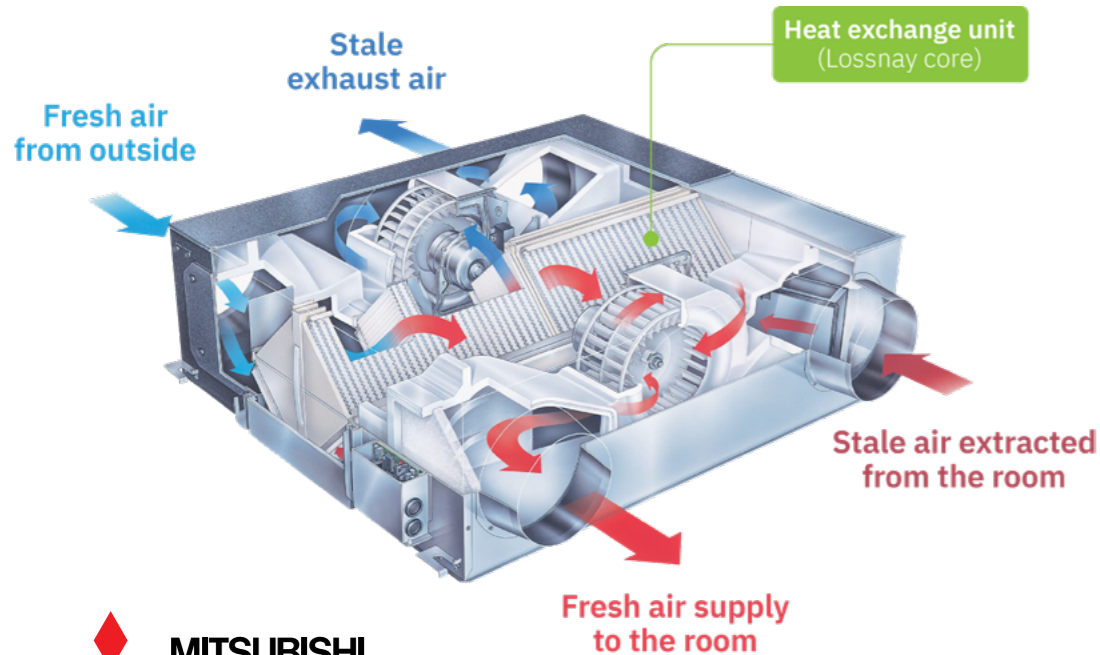

**R32**



Controller and Connection Options				
Models	Wired Remote	Group Control	Wi-Fi	Ext Input / Output
MSZ-HR 25-35 VF Classic	PAR-41MAA + (MAC-497IF)	1 x PAR-41MAA + (MAC-497IF) For each Indoor unit	(MELCloud)	(MAC-497IF) On/Off input or 12V Fault output
MSZ-AP25-71VGK	PAR-41MAA + (MAC-497IF)	1 x PAR-41MAA + (MAC-497IF) For each Indoor unit	(MELCloud)	(MAC-497IF) On/Off input or 12V Fault output
MSZ-EF 25-50 VG"K" Zens	PAR-41MAA + (MAC-497IF)	1 x PAR-41MAA + (MAC-497IF) For each Indoor unit	Functionality already included with unit	(MAC-497IF) On/Off input or 12V Fault output
MSZ-LN 18-60 Designer	PAR-41MAA + (MAC-497IF)	1 x PAR-41MAA + (MAC-497IF) For each Indoor unit	Functionality already included with unit	(MAC-497IF) On/Off input or 12V Fault output
MFZ-KT 25-50 Floor	PAR-41MAA + (MAC-497IF)	1 x PAR-41MAA + (MAC-497IF) For each Indoor unit	(MELCloud)	(MAC-497IF) On/Off input or 12V Fault output
PKA-M 35-100 Wall Mr Slim	PAR-41MAA	1x PAR-41MAA	(MELCloud)	(PAC-SA89) On/Off and (PAC-SA88) Run / Fault
Mr Slim Power Inverter PUZ-ZM35 - 140 & Standard Inverter PUZ-M100 - 140	PAR-41MAA	1x PAR-41MAA	(MELCloud)	(PAC-SA89) On/Off and (PAC-SA88) Run / Fault
Standard Inverter SUZ-M35 - 71	PAR-41MAA	1 x PAR-41MAA + (MAC-497IF) For each Indoor unit	(MELCloud)	(MAC-497IF) On/Off input or 12V Fault output



Pre Insulated Coils



9MM WHITE - BL-S1-DO

9MM BLACK - BL-S2-DO

13MM BLACK - CL-S1-DO

Part Number	Description	Description
C20038B 1/4T 9MM	20M 9mm 1/4 & 3/8	Black 9MM
C20012B 1/4T 9MM	20M 9mm 1/4 x 1/2	Black 9MM
C20058B 1/4T 9MM	20M 9mm 1/4 x 5/8	Black 9MM
C20058B 3/8T 9MM	20M 9mm 1/4 x 5/8	Black 9MM

Part Number	Description	Description
C20038 1/4T 9MM	20M 9mm 1/4 & 3/8	White 9MM
C20012 1/4T 9MM	20M 9mm 1/4 x 1/2	White 9MM
C20058 1/4T 9MM	20M 9mm 1/4 x 5/8	White 9MM
C20058 3/8T 9MM	20M 9mm 1/4 x 5/8	White 9MM

Pre insulated copper available in sizes 9mm and 13mm (black only)  
 9mm white available in 20m twin, 25m twin and 50m single  
 9mm black available in 20m twin and 50m single  
 13mm available in black 20m twin only

Bender Set



Code	Description
EZB Line Set	PACK OF 4 EASY BEND LINE SET BENDERS

RED = 1/4" | GREEN = 3/8"  
 YELLOW = 1/2" | BLUE = 5/8"

You must ream / deburr the copper before inserting an Easybend line set

- Pre Insulated Copper - Making Your Job Easier

FIRE RETARDANT PRE INSULATED COPPER

- Pre Insulated Copper allows you to install your pipework in half the time of conventional methods.
- Insulation manufactured to EN 13501. Fire classification - BL-s1,d0.
- 13mm wall black insulation with tough & durable polyethylene coating.
- Copper Coil manufactured to EN 12735-1.
- Can be easily separated during installation.
- 9mm in both black and white available to order.
- Also available to order 9mm black and white single 20m, 25m and 50m coil.



The Benefits

- Labour saving
- Easy clean coating
- Easy to transport & store
- Durable insulation coating
- Less waste, re-cap and re-use
- Resistant to vermin
- Fire rated and certified product



**FSW** | **cooleo**  
 Pre Insulated Copper

ONLY Available from **FSW**



FSW BRANCH NETWORK

Branches in Ireland

Visit our website for contact details  
[www.fridgespareswholesale.ie/our-branches](http://www.fridgespareswholesale.ie/our-branches)

**Belfast**

Unit 6  
 Hawthorn Business Centre  
 Wildflower Way  
 Boucher Way  
 Belfast  
 Email: [belfast@fsw.uk.com](mailto:belfast@fsw.uk.com)  
 Phone: +44 28 9066 5999  
 Postcode: BT12 6TA

**Cork**

Unit 15  
 Southside Industrial Estate  
 Togher  
 Co Cork  
 Ireland  
 Email: [cork@fridgespares.ie](mailto:cork@fridgespares.ie)  
 Phone: +021 431 7645  
 Eircode: T12 D659

**Dublin (West)**

Unit 1  
 Ballymount Business Park  
 Ballymount Drive  
 Dublin 12  
 Ireland  
 Email: [iandennis@fridgespares.ie](mailto:iandennis@fridgespares.ie)  
 Phone: +353 01 450 7514  
 Eircode: D12 XC7H

**Glasnevin**

Unit 15 Blackwater Rd  
 Dublin Ind Est  
 Glasnevin  
 Dublin 11  
 Ireland  
 Email: [info@fridgespares.ie](mailto:info@fridgespares.ie)  
 Phone: +353 01 830 3466  
 Eircode: D11 YK26



### Copper Tube



Part Number	Description
L6038 21G	6mtr length of 3/8 copper
L6012 20G	6mtr length of 1/2 copper
L6058 20G	6mtr length of 5/8 copper
L6034 19G	6mtr length of 3/4 copper
L6078 18G	6mtr length of 7/8 copper
L6078 19G	6mtr length of 7/8 copper 19G
L6118 18G	6mtr length of 11/8 copper
L6138 18G	6mtr length of 13/8 copper



Part Number	Description
C15014	415M Coil 1/4"
C15038	35M Coil 3/8"
C15012	32M Coil 1/2"
C15058	32M Coil 5/8"
C15078	26M Coil 7/8"



Part Number	Description
C30014 22G	30M Coil 1/4"
C30038 21G	30M Coil 3/8"
C30012 21G	30M Coil 1/2"
C30058 20G	30M Coil 5/8"
C30078 19G	30M Coil 7/8"

### Insulation



#### 9mm Wall

Part Number	Description
09006COIL 70MT	1/4" 6-9 X 70M Coil
09010COIL 50MT	3/8" 10-9 X 50M Coil
09012COIL 45MT	1/2" 12-9 X 45M Coil
09015COIL 40MT	5/8" 15-9 X 40M Coil
09022COIL 30MT	7/8" 22-9 X 30M Coil



#### 13mm Wall


Part Number	Description
13006COIL 45MT	1/4" 6-13 X 45M Coil
13010COIL 35MT	3/8" 10-13 X 35M Coil
13012COIL 32MT	1/2" 12-13 X 32M Coil
13015COIL 32MT	5/8" 15-13 X 32M Coil
13022COIL 26MT	7/8" 22-13 X 26M Coil

### Insulation Accessories



Part Number	Description
10TAPE	10m Class O Tape
15TAPE	15m Class O Tape
14ADHE	250ml Adhesive with Brush
2TAPE	2 Inch PVC tape - Black
2TAPEWHITE	2 Inch PVC tape - White

### Tube Clamp



Code	Description
GRIPLOCKSIZE1	Pre Insul Pipe Clip (Pk 10) 1/4x1/2
GRIPLOCKSIZE2	Size Two Grip Lock (Pk 10) 3/8x5/8
GRIPLOCKSIZE3	Size Three Grip Lock (Pk 10) 1/2+7/8
BVT025	1/4" Tube Clamp
BVT037	3/8" Tube Clamp
BVT050	1/2" Tube Clamp
BVT062	5/8" Tube Clamp
BVT087	7/8" Tube Clamp

### Clips



Code	Description
SC08-22	3/8 CLIP FOR 8MM ROD
SC08-35	11/4 CLIP FOR 8MM ROD
SC08-42	11/2 CLIP FOR 8MM ROD
SC10-22	3/8 CLIP FOR 10MM ROD
SC10-35	11/4 CLIP FOR 10MM ROD
SC10-42	11/2 CLIP FOR 10MM ROD

### Overflow Pipe



Part Number	Description
MARLEYPipe 3/4	3/4" x 3m Plastic Water Tube
MARLEYPipe 11/4	11/4" x 3m Plastic Water Tube
MAR3/4WASTECLIP	3/4" Talon Snap-In Open Clips
MAR11/4WASTECLIP	11/4" Talon Snap-In Open Clips
MAR3/490ELBOW	3/4" Plastic 90 Elbow
MAR11/490ELBOW	11/4" Plastic 90 Elbow
MARLEY3/4TEE	3/4" Plastic Tee
MARLEY11/4TEE	11/4" Plastic Tee
MAR3/4CONNECT	3/4" Plastic Coupler
MAR11/4CONNECT	11/4" Plastic Coupler
MAR3/4 45DEGREE	3/4" Plastic 45 Degree Elbow
MAR11/4 45DEGREE	11/4" Plastic 45 Degree Elbow
MARLEYGLUE250	Solvent Cement White X 125 MI

### Overflow Adaptors



Part Number	Description
FP2016	Adaptor Overflow To Waste - 21-25mm Pk3
FP2017	Adaptor Overflow To Waste - 21-32mm Pk3
FP2018	Adaptor Overflow To Waste - 21-40mm Pk3
FP2038	6 Or 10mm Tube To Soil Stack Pk3
FP2040	6 Or 10mm Tube To Overflow Pipe Pk3

### Braided Hose



Part Number	Description
HOSE14	30M Coil 1/4" Braided
HOSE38	30M Coil 3/8" Braided

### Brackets



Code	Description
MS230MOUNTBRACK	84KG 420mm Support Arm
MS257 BRACKET	84KG 550mm Support Arm
MS403 BRACKET	180KG 620mm Support Arm
MS404 BRACKET	180KG 800mm Support Arm
MS258 BRACKET	84KG 650mm Support Arm

### Adaptors - Cassettes to Tank Pumps



Part Number	Description
ADAPTOR 1"	1" X 3/4 Adaptor (Pk3)
ADAPTOR 1.1/4"	1-1/4 X 3/4 Adaptor (Pk3)

### Cantilever Arms



Code	Description
P2663/300	300mm Cantilever Arm
P2663/450	450mm Cantilever Arm HD
P2663/600	600mm Cantilever Arm HD
P2663/750	750mm Cantilever Arm HD
P2663/900	900mm Cantilever Arm HD
P2663X450	450mm Cantilever Arm HD
P2663X600	600mm Cantilever Arm HD
P2663X750	750mm Cantilever Arm HD
P2663X900	900mm Cantilever Arm HD

### Cable Ties



Code	Description
CABLE TIES BLACK 100 PER PACK	
CT280-4.8MM	Cable Ties 300mm x 4.8
CT360-4.8MM	Cable Ties 368mm x 4.8
CT360-7.8MM	Cable Ties 380mm x 7.8
WHITE CABLE TIES 100 PER PACK	
CTC300-4.8MM	Cable Ties 300mm x 4.8 white
CT360-7.8MM W	Cable Ties 380mm x 7.8 white

### Mounting Blocks



Code	Description
B6735	Fix it foot 250mm
B6736	Fix it foot 450mm
B6737	Fix it foot 600mm
B9096	Fix it foot 1000mm

Custom support frames available on request

### Security Cages & Drip Trays



Part Number	Description
CAGE-S	Small 750H 1050W 460D
CAGE-M	Medium 1150H 1150W 650D
CAGE-L	Large 1450H 1150W 650D
CAGE-XL	Extra-Large 1800H 1150W 650D
VS110CONDTRAY	Condensing Unit Drip Tray
VS210CONDTRAY	Condensing Unit Drip Tray

### Slotted Channel



Code	Description
MC403 6M	Channel Slotted 40mm x 40mm 6 meter
MC403 3M	Channel Slotted 40mm x 40mm 3 meter
MC203 6M	Channel Slotted 20mm x 40mm 6 meter
MC203 3M	Channel Slotted 20mm x 40mm 3 meter

Plain non-slotted channel also available

### Cable Tray and Hangers



Part Number	Description
MT-75	75 X 25 3M Cable Tray
MT-100	100 X 25 3M Cable Tray
MT-150	150 X 25 3M Cable Tray
MT-225	225 X 25 3M Cable Tray
MT-300	300 X 25 3M Cable Tray
A520	25-Ck Tray Coupling (Pairs)
LBC 100 100 MM	100mm Tray Hanger (4")
LBC 150 150MM	150mm Tray Hanger(6")
LBC 225 225MM	225mm Tray Hanger (9")

Custom support frames available on request

Spring Nuts



Code	Description
M6SS	6mm Spring Nut Short
M8SS	8mm Spring Nut Short
M10SS	10mm Spring Nut Short
M6LS	6mm Spring Nut Long
M8LS	8mm Spring Nut Long
M10LS	10mm Spring Nut Long

Plain Channel Nuts



Part Number	Description
M6NS	Sn-A-06 Plain Nut
M8NS	Sn-A-08 Plain Nut
M10NS	Sn-A-10 Plain Nut

Hex Screws / Nuts / Washers



Various bolt sizes available



Code	Description
M6	ZP Bolts Range
M8	ZP Bolts Range
M10	ZP Bolts Range
M6ZPNUT	6mm Nut
M8ZPNUT	8mm Nut
M10ZPNUT	10mm Nut
M6MUD	6mm Washer
M8MUD	8mm Washer
M10MUD	10mm Washer

Threaded Rod




Full range of fixings also available in all sizes



Code	Description
M8ZP ROD	3MTR 8mm Threaded Rod
M10ZP ROD	3MTR 10mm Threaded Rod
M12ZP ROD	3MTR 12mm Threaded Rod
M8 CONNECT	8mm rod connector
M10 CONNECT	10mm rod connector
M8/M10SOCKETWEDG	Socket Bolt M8/M10 Rod
M8/M10 BASE PLAT	Dual Backplate M8/M10 Rod

# StrutFoot

## Universal Flat Roof Support System

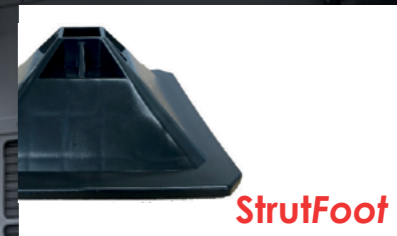

✓ 100% recycled ✓ Lightweight ✓ Robust ✓ Anti-vibration ✓ Available worldwide



+00353 1 830 3466




sales@fridgespares.ie



www.fridgespareswholesale.ie



## StrutFoot Plastic Feet



Part Number	Description
R200 Plastic Foot	200 x 200 x 120
R305 Plastic Foot	305 x 305 x 120
R500 Plastic Foot	500 x 500 x 120

## H Frame Kits



Part Number	Description
SF3305	Feet Size - 305mm
SF3500	Feet Size - 500mm


## StrutFoot Base &amp; Plus



Part Number	Description
SF1002	StrutFoot Base
SF1004	StrutFoot Plus

## Mitsubishi Electric Unit - Parts used

- 2 x B6737
- 1 x VS210 Condensate Tray
- 1 x VS240 Brackets

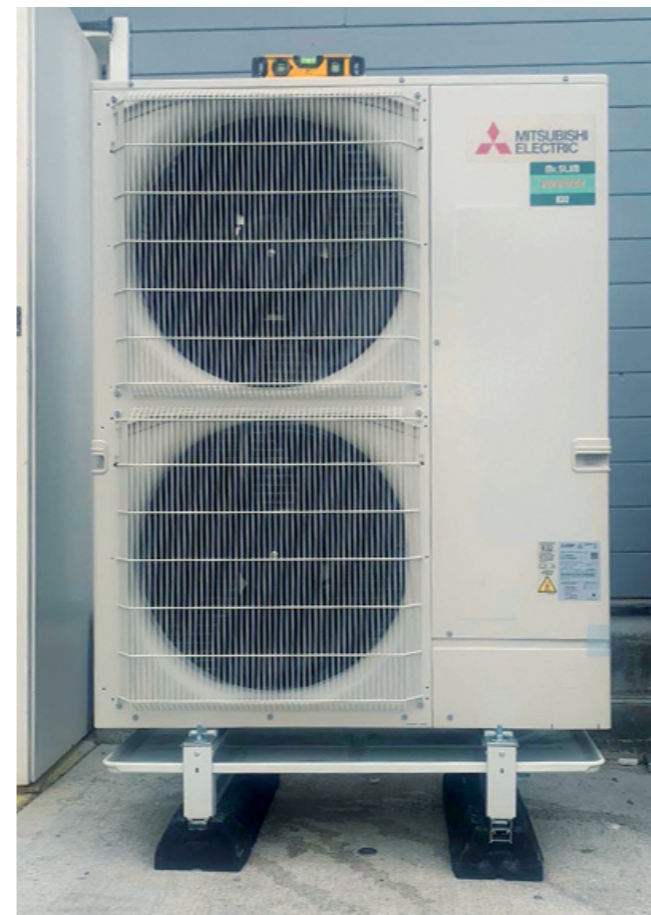

Refrigerants




Part Number	Description
R407C (AG)	R407C X 13.0Kg
R407C-56GAS (AG)	R407C X 55Kg
R410A (AG)	R410A X 11Kg
R410A-50KGS (AG)	R410A X 50Kg
R32 (AG)	R32 X 10Kg
LEFTHANDCYLADAP	R32 Cylinder Adaptor

Reclaim and Recievers



Part Number	Description
RECOVERY 12.5 LI	Rpr X 10Kg Reclaim Cylinder
RECCYL61L AGAS	Rpr X 45Kg Reclaim Cylinder

Pipe & Cabling Trunking



Part Number	Description
DELTA INT ELBOW	DELTA INTERNAL CORNER 80MM
DELTA EXTER ELBS	DELTA EXTERNAL CORNER 80MM
DELTA UPPER CONN	DELTA CONNECTION PIECE 80MM
DELTA WALL TER	DELTA WALL TERMINAL 80MM
DELTA T-JOINT	DELTA T JOINT 80MM
DELTA TRUNKING	DELTA DUCTING 80X60 2M

Electrical Cables



Part Number	Description
CABLEIYCYLSF275	2 Core X.75 Screened Cable
CABLEIYCYLSF215	2 Core X 1.5 Screened Cable
CABLEFLEXLS/H2X	FLEX- 2X.75
CABLEFLEXLS/H3X1	3 Core X 1.0 Flex Cable
CABLENYMJS3/1.5	3 Core X 1.5 Nymj Cable
CABLENYMJS4/1.5	4 Core X 1.5 Nymj Cable
CABLENYMJS5/1.5	5 Core X 1.5 Nymj Cable

Cable now comes with low smoke zero halogen specification

Isolators, Circuit Breakers and Detectors



Part Number	Description
ISOLATOR 25AMP 3	Isolator - 25AMP 3
ISOLATOR 32AMP 3	Isolator - 32AMP 3
ISOLATOR 40AMP 3 POLE	Isolator - 40AMP 3 pole
MCB1 20A	Single Pole 20a Hager Mcb
RCBO 16AMP	Rcbo 6ka b curve 16amp 30ma class a 2 Pole 2 mod

Chemicals

Part Number	Description
	Sanibact Evaporator Cleaner & Disinfectant
	CondenCide® Evaporator Cleaner & Disinfectant
	EasyCare Evaporator Cleaner & Disinfectant
	HydroCoil® Alkaline Evaporator Cleaner
	RTU® Evaporator Cleaner & Disinfectant 1L
	RTU® Evaporator Cleaner & Disinfectant 5L
	RTU® Evaporator Cleaner 1L
	RTU Condenser Cleaner (1 Litre)
	RTU Condenser Cleaner (5 Litre)
	HydroKleen® Alkaline Condenser Cleaner
	Errecom 'Best' Alkaline Condenser Cleaner

OFN



Part Number	Description
OFN (10LTR) IDS	Oxygen Free Nitrogen
OFN (30LTR) IDS	Oxygen Free Nitrogen
GA-750	Ga-750 Nitrogen Regulator



# THE TANK PUMP REINVENTED BY SAUERERMANN



Meet our Si-83.  
Forget about what you used to know. Make it easy.

N755



Easiest installation  
in the market



Save time :  
designed for  
intuitive installation



Easy Si-83 App :  
Tools and tips  
in your smartphone



## Mini Pumps



Part Number	Description
PUMP MINI ORANGE	Aspen Mini-Orange
PUMP MINI AQUA*	Aspen Mini Aqua
PUMP BLANC DELUX	Aspen Mini Blanc Pump
SI-1000 PUMP	Sauerermann Si10 Universal
SI-3000 PUMP	Sauerermann Si 30 Mini
BLUE DIAMOND	Blue Diamond Mega Blue



## Tank Pumps



Part Number	Description
ASPEN MAX HI-FLO	Aspen Max Hi Flow
FP1056/2 MINI T	Aspen Mini Tank
VCC-20S	Little Giant Vcc20S 1 Litre
NXTGEN PUMP	Little Giant Vcma20S 2 Litre
SI-8200 PUMP	Sauerermann Si-82 2 Litre
SI-83	Sauerermann Si 83 2 Litre



## Pumps in Trunking



Part Number	Description
PUMP SILENT T	Aspen Silent Mini Lime + Slim Line Trunking
PUMP SILENT ARTI	Aspen Silent+ Mini Lime BBJ Trunking
PUMP SILENT REP	Aspen Silent+ Mini Lime Pump Only
DELTA PACK PUMP	Sauerermann Delta Pure White
SI-1000 PUMP	Si 10 Pump only

## Universal Cassette Pump




Part Number	Description
SI-2052 PUMP	Si 2052 Universal Pump For Cassettes

## Peristaltics Pumps



Part Number	Description
PUMP PERISTALTI	Aspen Universal Pump

		System Type							Duty @ 50Hz					Mounting							
		Cassette	Wall Mount	Ducted	Under Ceiling	Humidifier	Dehumidifier	Floor Type	Gas Condensing Boiler	Oil Condensing Boiler	Max Flow (l/hr)	Max Head (m)	Suction lift (m)	Sound dB(A)	Max kW / BTUs	Trunking	In Unit	Remotely	Below Unit	Wall	Floor
Silent+	Micro-v		•	•	•				14.5	10	2	19	19.3 / 66k	•	•	•					
	Silent+ Mini Orange		•	•	•		•		12		-	20	16 / 54k	•	•	•					
	Silent+ Mini Lime		•	•	•		•														
	Silent+ Mini Aqua		•	•	•		•	•			2	19		•	•	•					
Mini	Mini Orange		•	•	•		•		12	10	2	21	16 / 54k	•	•	•					
	Maxi Orange		•	•	•		•		35	15	-	35	46 / 157k	•		•					
	Maxi Lime		•	•	•		•							•	•	•					
	Mini Aqua		•	•	•		•	•			2	21	16 / 54k	•	•	•					
	Mini Blanc		•						12	10	-						•				
Tank	Mini Tank			•			•	•	35	15		35	46 / 157k		•		•				
	Max Hi-Flow	•		•			•		550	5		44	733 / 2.5m				•				
	Hi-Lift 1L & 2L	•		•			•		11	12		51	14 / 47k				•				
	Heavy Duty 6	•					•		900	6	-	60	1200 / 4m				•				
	Heavy Duty 10	•					•		1070	9		64	1460 / 4.9m				•				
	HW Economy						•		900	7		60	1200 / 4m				•				
	Hot Water HD						•		1800	15		63	2400 / 8m				•				
Peristaltic	Universal		•	•	•				6.5	12	3	47	8.5 / 29k			•	•				
	Standard		•	•	•		•									•	•				
	MK4		•	•	•		•									•	•				
	Mechanical		•	•	•		•									•	•				
Boiler	Kitchen						•		12	10		21	45 / 153k					•			
	Compact						•		35	15	-	35	85 / 290k					•	•		
	Hi-Capacity						•	•	550	5		44	200 / 682k					•	•		

		Equipment							Location											
		Wall mounted	Cassette	Multi cassette	Conditioning cabinet	Floor standing	Ducted unit	Suspended ceiling unit	Inside the unit	Inside ducting	Wall mounted	Floor mounted	False ceiling							
	OMEGA PACK	x																	x	
	Si-20	x											x	x						
	DELTA PACK	x																		x
	Si-10 UNIVERS'L			x				x				x	x							x
	Si-30 Si-33	x						x				x								x
	Si-60							x	x	x			x							x
	Si-82							x	x				x						x	x
	SI 1805							x					x						x	x
	SI 1830							x	x			x	x	x					x	x
	SI 2052			x								x	x	x						
	PE5000 PE5100 PE5200	x	x																	x

## Manifolds



Part Number	Description
VMG-2-R410A	Value R410A 2 Way Manifold Set + Case + Lines
VMG-2-R134A	Value R404A/R407C/R22/R134A 2 Way Manifold Set + Case + Lines
VMG-2-32 MANIFOL	Value R32 2 Way Manifold Set + Case + Lines
VMG-4-R32	Value R32 4 Way Manifold Set + Case + Lines
VMG-4-R410A	Value R410A 4 Way Manifold Set + Case + Lines

## Digital Manifolds



Part Number	Description
TESTO 550I	Testo 550 2 Way Digital Manifold
TESTO557S SMART	Testo 557 4 Way Digital Manifold
TESTOSMAPROSET	Testo Refrigeration Smart Probe Set
TESTO 552	Testo 552 Digital Bluetooth Torr Gauge

## Oxygen, Maxy and Map Gas



Part Number	Description
OXIGEN110	Oxygen 110 Cylinder For Turbo 90 & 1000
MAXIGAS	Maxy Gas Cylinder For Turbo 90 & 1000
TURBOSET90	Turbo Set 1000 Brazing Kit
MAPP	Map-Plus/Map Pro
STK-11	Stk-11 Turbo Torch Double Barrel Torch
FLAMETECH ELITE	Portable Brazing Set

## Tube Cutters



Part Number	Description
VTC-19	Mini Pipe Cutters 1/8" - 3/4"
VTC-28	Compact Pipe Cutter 1/8" - 1-1/8"
VTC-28B	Pipe Cutters 1/8" - 1-1/8"
VTC-32	Pipe Cutters 1/8" - 1-1/4"
VTC-42	Pipe Cutters 1/4" - 1-5/8"
VTC-70	Large Pipe Cutters 1/4" - 2-5/8"

## Tube Expander



Part Number	Description
VST-29-A	Compact hydraulic tube expander including 7 heads

## Flare/Swage Kit



Part Number	Description
VFT-808-I	FLARING TOOL 1/4 TO 3/4"

## Charging Scales



Part Number	Description
VRS-120I-01	Navtek Charging Scales 120KG

## Recovery Units



R32 Ready!

Part Number	Description
APP GSTWIN	Appion G5 Twin Cylinder Recovery Machine - 240V
APP GSTWIN	Appion G5 Twin Cylinder Recovery Machine - 110V




## Vacuum Pumps



R32 Ready!

Part Number	Description
APP TEZ8	Appion TEZ8 - 8CM Vacuum pump 240V
APP TEZ8	Appion TEZ8 - 8CFM Vacuum Pump 110V

# Apps Available

Manufacturer	Name	Functions
	ME Engineer	Fault Codes Trouble Shooting Service Information Spare Parts Refrigerant Calculator Thermistor Values
	ME Library	Sales Literature Technical Documents Quick Reference Guides Install Manuals Service Manuals Instruction Guides
	Condensate Pump Finder	Pump Selector Pump Information Technical Information
	Condensate Pump Selector	<a href="https://aspenpumps.com/pump-selector">https://aspenpumps.com/pump-selector</a>

## Mitsubishi Electric Air Conditioning equipment warranty.

The warranty is held by the **manufacturer** and not FSW. Mitsubishi Electric currently offer 3 years' warranty on their product range. Accredited Installers (AI) can offer up to 5 years' warranty and Business Solutions Providers (BSP) offer up to 7 years' warranty.

## Disclaimer

Whilst every effort has been made to ensure the accuracy of the data contained in the publication at time of printing, we reserve the right to change specifications and pricing at any time. You are advised to check the accuracy of any technical data shown with the manufactures' published data. Manufactures' data will be updated at regular intervals and therefore this publication should only be used as a guide. FSW accepts no liability for errors or omissions contained within. E&OE.

## Rating Conditions

### Indoor

Cooling: +27C DB / 19C WB

Heating: +20C DB

### Outdoor

Cooling: +35C DB / 24C WB

Heating: +7C DB / 6C WB

## Design and Operational Specification

For design and operational specifications, please refer to the relevant manufactures technical details.



# THE SOLVENT WELD A/C UNIT DRAIN ADAPTOR

TOUGH ABS PLASTIC ENABLES A LEAK FREE SOLVENT WELD CONNECTION TO DRAIN PIPE

**GUARANTEED TO OUT-LAST THE LIFE OF THE UNIT**



PREMIUM AUTOMOTIVE GRADE RUBBER IS GUARANTEED TO OUT-LAST THE LIFE OF THE UNIT


AVAILABLE IN 2 POPULAR SIZES:  
SMALL: 1" - 3/4" (21.5MM)  
MEDIUM: 1 1/4" - 3/4" (21.5MM)



RUBBER UNIT DRAIN ADAPTOR

MOST LEAKS OCCUR AT THIS 2ND CONNECTION

Condensate flows against the critical unglued drain connection which is a common cause of leaks

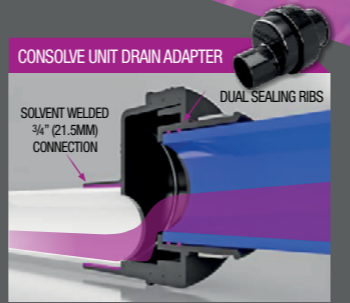

CONSOLVE UNIT DRAIN ADAPTER

SOLVENT WELDED 3/4" (21.5MM) CONNECTION


DUAL SEALING RIBS

Condensate flows over the joints, not into the joints!

Code	Description
CONSOLVE AD 1	Solvent Weld A/c Unit Drain Adaptor 1" To 3/4"
CONSOLVE AD 11/4	Solvent Weld A/c Unit Drain Adaptor 1 1/4" To 3/4"

# CONVENTION vs INNOVATION...

FOR MORE INFORMATION VISIT: [WWW.TERLOK.COM](http://WWW.TERLOK.COM)

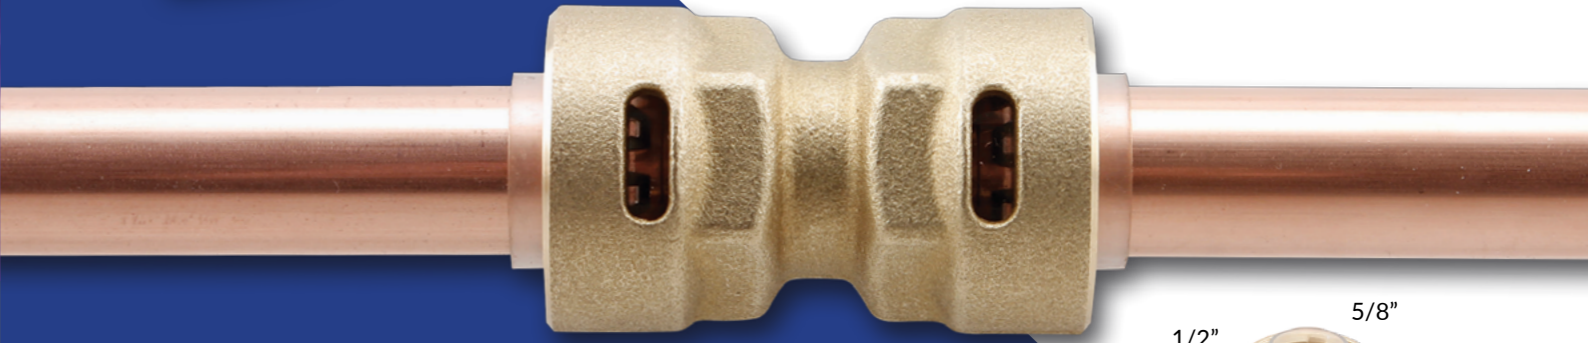

# Push-to-Connect Refrigerant Fittings



NO BRAZING, NO OFN PURGING, NO HOT WORKS

# FSW BRANCH NETWORK

## **Belfast**

Unit 6  
Hawthorn Business Centre  
Wildflower Way  
Boucher Way  
Belfast  
Postcode: BT12 6TA  
Email: [belfast@fsw.uk.com](mailto:belfast@fsw.uk.com)  
Phone: +44 28 9066 5999

## **Dublin (West)**

Unit 1  
Ballymount Business Park  
Ballymount Drive  
Dublin 12  
Ireland  
Eircode: D12 XC7H  
Email: [iandennis@fridgespares.ie](mailto:iandennis@fridgespares.ie)  
Phone: +353-1-4507514

## **Cork**

Unit 15  
Southside Industrial Estate  
Togher  
Co Cork  
Ireland  
Eircode: T12 D659  
Email: [cork@fridgespares.ie](mailto:cork@fridgespares.ie)  
Phone: +353-21-4317645

## **Glasnevin**

Unit 15 Blackwater Rd  
Dublin Ind Est  
Glasnevin  
Dublin 11  
Ireland  
Eircode: D11 YK26  
Email: [info@fridgesapres.ie](mailto:info@fridgesapres.ie)  
Phone: +353 1 8303466

